

## Dual view sets new standards: for an unobstructed view in any situation.

### Safety redefined:

always perfect line-of-sight in the main driving direction – as with a truck

### After 180° rotation:

the skip and therefore the working area are still ideally in view in this seat position

### Easy and intuitive operation

thanks to the fully hydrostatic drive



# dual view

DV60 DV90 DV100

### Further highlights:

- Ergonomic joystick handle with a travel direction switch-over function – one hand can always remain on the steering wheel
- Compact dimensions: The dual view safely runs as a construction truck, but is significantly more maneuverable
- Full load monitoring and precise dumping thanks to the high seat position
- Broader and more comfortable entry to the driver's cabin
- Wear-free operation, easy-to-operate spring-loaded parking brake for durability and reliability
- Reduced fuel consumption due to the efficient hydrostatic all-wheel drive with the automatic ECO mode
- Simple maintenance due to access from the ground via the lateral engine hood

## Unrestricted view – especially in the main travel direction!



### 180°-rotation of the entire driver's cabin:

Release the lock, turn the seat together with the console and continue working as usual in no time.



### More safety:

Perfect view of the working area at all times - whether during transportation, loading or unloading.



### Higher productivity:

Act safely and with precision, even in confined spaces - no time wasted and no fuel consumption due to maneuvering.




## Simply see more.

The dual view clearly stands above the requirements of the line-of-sight standard ISO 5006:2017.

From here you can overlook a height of 1.2 m with the dual view\*

From here, you must be able to overlook a height of 1.2 m according to the line-of-sight standard

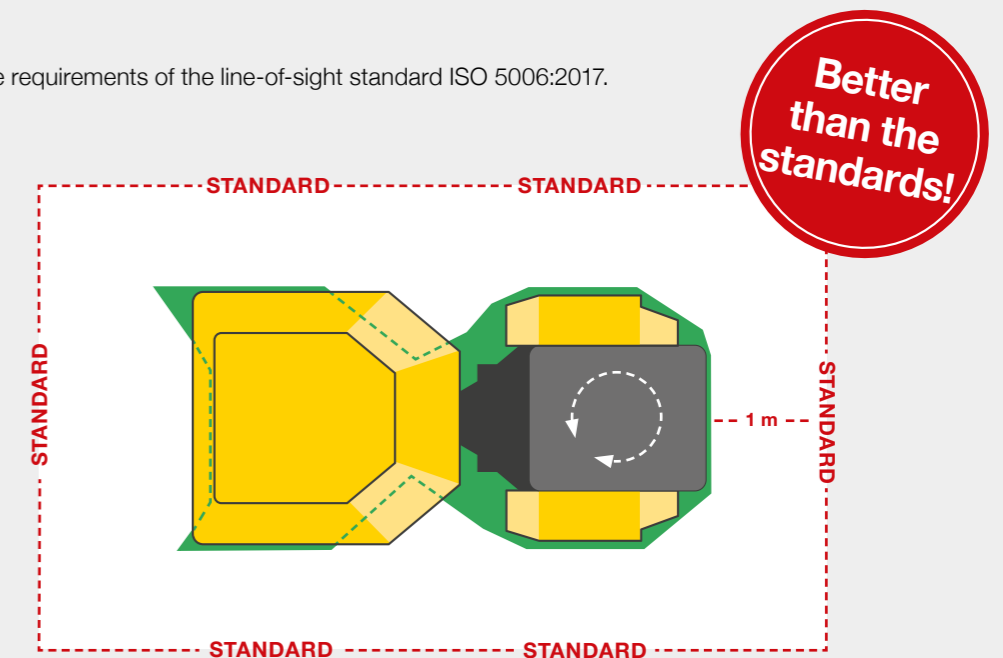

\* With mirrors and a rear view camera

You can find more information about dual view at: [www.wackerneuson.com/dualview](http://www.wackerneuson.com/dualview)



**Increased operating comfort due to an ergonomic swivel console.**

Screen for standard rear view camera with lockable anti-vandalism protection; screen and camera meet IP69 requirements

Steering column with tilt adjustment facilitates safe ascent and descent

Additional storage possibility



Multifunctional display for machine functions

Joystick handle with travel direction change-over and skip actuation

Easy 180° rotation – no time-consuming turning maneuvers.

Rotating assembly mounted on bearings for quick change of the sitting position



**The whole performance in numbers.**

dual view	DV60	DV90	DV100
Power output (kW)	55	55	55
Payload (kg)	6,000	9,000	10,000
Skip volume heaped (l)	3,600	4,600	5,000
Maximum speed (km/h) *	30	30	30
Machine width in (mm)	2,250	2,450	2,450

\* Front tip skip



**Dual View - All round visibility**



**WACKER NEUSON**  
*all it takes!*



**0845 505 7070**

[www.cphire.com](http://www.cphire.com)



**Birmingham | Bristol | Cardiff | Swansea**

Supplied by



[www.equipment-one.com](http://www.equipment-one.com)