









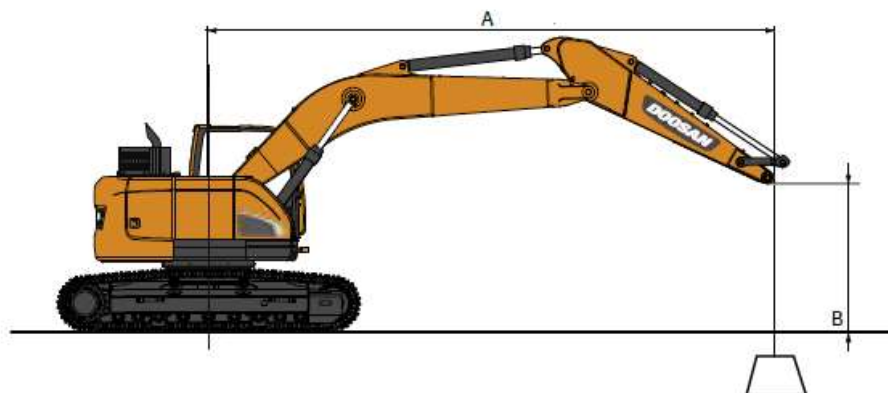




## Lifting capacities

# DX140LCR-5

➤ Standard track width: 2590 mm • W/O Bucket

Unit: 1000 kg	A	Chassis Frame Attachment	1.5 m		3.0 m		4.5 m		6.0 m		Max. reach				
	B												A		
One-piece boom 4.60 m Arm 3.0 m Shoe 700 mm Counterweight 3.4 t	7.5 m	Dozer up										2.42 *	2.42 *	4.34	
		W/O dozer										2.42 *	2.42 *	4.34	
	6.0 m	Dozer up					3.28 *	3.28 *					2.05 *	2.05 *	5.91
		W/O dozer					3.28 *	3.28 *					2.05 *	2.05 *	5.91
	4.5 m	Dozer up					3.56 *	3.56 *	3.21 *	2.53			1.94 *	1.94 *	6.82
		W/O dozer					3.56 *	3.56 *	3.21 *	2.56			1.94 *	1.94 *	6.82
	3.0 m	Dozer up			5.82 *	5.82 *	4.76 *	3.82	3.85	2.45			1.96 *	1.77	7.30
		W/O dozer			5.82 *	5.82 *	4.76 *	3.86	3.89	2.47			1.96 *	1.79	7.30
	1.5 m	Dozer up			9.28 *	6.51	5.82	3.55	3.72	2.33			2.08 *	1.67	7.45
		W/O dozer			9.28 *	6.58	5.89	3.59	3.76	2.36			2.08 *	1.69	7.45
	0.0 m	Dozer up			8.35 *	6.06	5.58	3.34	3.61	2.23			2.35 *	1.69	7.29
		W/O dozer			8.35 *	6.14	5.65	3.38	3.65	2.26			2.35 *	1.71	7.29
	-1.5 m	Dozer up		5.20 *	5.20 *	10.13 *	5.96	5.47	3.25	3.56	2.18		2.86 *	1.85	6.79
		W/O dozer		5.20 *	5.20 *	10.13 *	6.03	5.53	3.29	3.6	2.21		2.86 *	1.87	6.79
	-3.0 m	Dozer up		8.20 *	8.20 *	9.55 *	6.03	5.48	3.26				3.71	2.28	5.87
		W/O dozer		8.20 *	8.20 *	9.55 *	6.1	5.55	3.3				3.75	2.31	5.87
	-4.5 m	Dozer up				6.60 *	6.26						4.42 *	3.72	4.24
		W/O dozer				6.60 *	6.33						4.42 *	3.76	4.24



 : Rating over front.  
 : Rating over side or 360°.

- Lifting capacities are in compliance with ISO 10567:2007(E).
- The load point is at the end of the arm.
- \* = The nominal loads are based on hydraulic capacity.
- The nominal loads shown do not exceed 75% of tipping loads or 87% of hydraulic lifting capacity.
- For lifting capacity with bucket, simply subtract the actual weight of the bucket from the values.
- The configurations indicated do not necessarily reflect the standard equipment of the machine.