

# Standard equipment

Model	U50-5	U56-5	KX060-5
<b>Safety system</b>			
Engine start safety system on the left console	●	●	●
Travel motor with disc brake	●	●	●
Swivel motor with disc brake	●	●	●
Overload warning buzzer	●	●	●
Kubota original anti-theft system	●	●	●
Anti-drop valve on the boom (ISO8643)	●	●	●
Anti-drop valve on the arm (ISO8643)	●	●	●
Bracket and harness for beacon light	●	●	●
<b>Working equipment</b>			
Auxiliary hydraulic circuits (SP1 and SP2*) piping to the arm end	●	●	●
2 LED working lights on cabin and 1 LED light on the boom	●	●	●
1820 mm arm			●
1635 mm arm		●	
1450 mm arm	●		
<b>Cabin</b>			
ROPS (Roll-over Protective Structure, ISO3471)	●	●	●
OPG (Operator Protective Guard) Level1	●	●	●
Double adjustable air suspension seat	Type L	Type L	Type L
Double adjustable full suspension seat	Type S & M	Type S & M	Type S & M
Retractable orange seatbelt with alert function	●	●	●
Hydraulic pilot control levers with wrist rests	●	●	●
Travel levers with foot pedals	●	●	●
Air conditioning	Type L	Type L	Type L
Cabin heater for defrosting and demisting	●	●	●
Emergency exit hammer	●	●	●
Front window power-assisted with gas damper	●	●	●
12V power source	●	●	●
2 speakers and radio aerial	●	●	●
Location for radio	●	●	●
Side/Rear mirrors (left, right and rear)	●	●	●
Cup holder	●	●	●
<b>Engine/Fuel system</b>			
Double-element air filter	●	●	●
Engine electric fuel pump	●	●	●
Auto idling system	●	●	●
Tank electric refuelling pump			Type M & L
Water separator with filter	●	●	●

Model	U50-5	U56-5	KX060-5
<b>Undercarriage</b>			
400 mm rubber track	●	●	●
1 x upper track roller	●	●	●
5 double-flange track rollers on each track		●	●
4 double-flange track rollers on each track	●		
2-speed travel switch on dozer lever	●	●	●
<b>Hydraulic system</b>			
Two-speed travel with auto-shift	●	●	●
Dozer blade with float function	●	●	●
Pressure accumulator	●	●	●
Hydraulic pressure checking ports	●	●	●
Straight travel circuit	●	●	●
Third line hydraulic return	●	●	●
Electronically controlled third line hydraulic return		Type M & L	Type M & L
Load-sensing hydraulic system	●	●	●
Adjustable maximum oil flow on auxiliary circuits (SP1 and SP2*)	●	●	●
Auxiliary switch (SP1) on right control lever	●	●	●
Auxiliary switch (SP2) on left control lever		Type M & L	Type M & L

# Optional equipment



Model	U50-5	U56-5	KX060-5
<b>Working equipment / Undercarriage</b>			
1570 mm arm			Type L
400 mm steel track (+ 100 kg)	●	●	●
550 mm steel track (+ 300 kg)		●	●
<b>Safety system</b>			
Anti-drop valve unit (dozer)	●	●	●
Travel alarm	●	●	●
<b>Others</b>			
Rear-view camera*1	●	●	●
Special paint upon request	●	●	●

# Standard equipment for each type

Model	U50-5			U56-5			KX060-5		
Type	S	M	L	S	M	L	S	M	L
<b>Air conditioning</b>	-	-	●	-	-	●	-	-	●
<b>Air suspension seat</b>	-	-	●	-	-	●	-	-	●
<b>AUX SP1 / SP2</b>	● / -	● / ●	● / ●	● / -	● / ●	● / ●	● / -	● / ●	● / ●
<b>Electronic third line</b>	-	-	-	-	●	●	-	●	●
<b>Refuelling pump</b>	-	-	-	-	-	-	-	●	●

\*2 For Types M and L.

# Working range

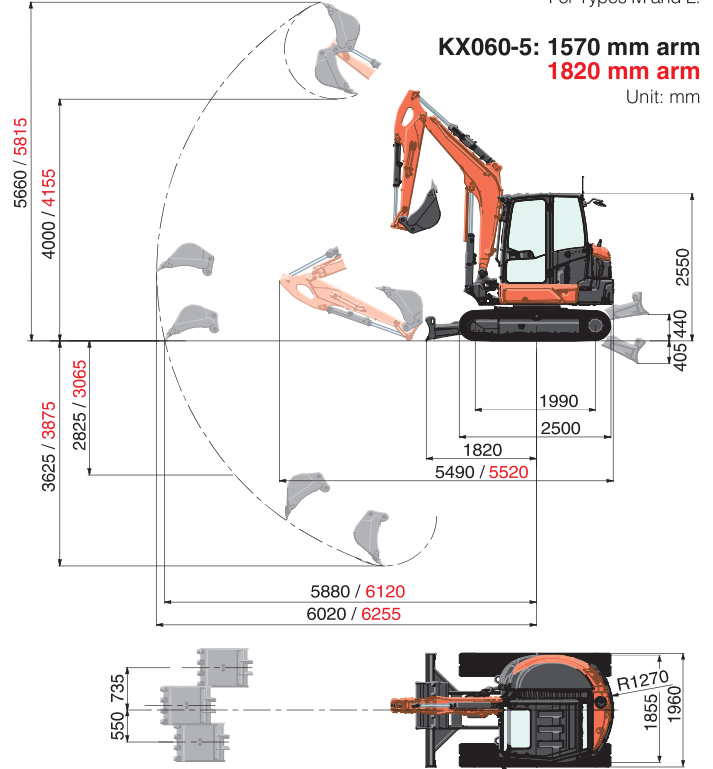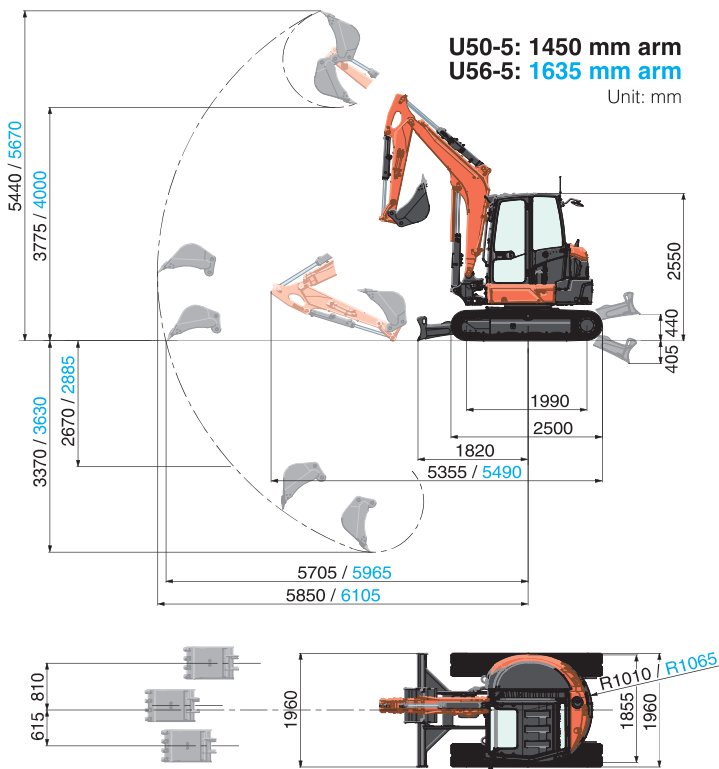

\*1 Prior to fitment, the machine already satisfies the visibility performance criteria defined in ISO5006. The rear-view camera enhances operator's visibility, but does not replace the need for viewing directly and using the mirrors fitted.

# Specifications

<b>Model</b>		U50-5	U56-5	KX060-5
<b>Operating weight*1</b>	kg	4965	5595	5635
<b>Bucket capacity std. SAE / CECE</b>	m <sup>3</sup>	0.13 / 0.11	0.14 / 0.12	0.14 / 0.12
<b>Bucket width (without teeth)</b>	mm	550	600	600
<b>Engine</b>				
Manufacturer		KUBOTA	KUBOTA	KUBOTA
Model		D1803-CR-T-E5	V2607-CR-E5	V2607-CR-E5
Type		Water cooled, diesel engine	Water cooled, diesel engine	Water cooled, diesel engine
Emission standard		EU Stage V	EU Stage V	EU Stage V
Output (ISO 14396:2002) <sup>2</sup>	PS (kW) / rpm	40.4 (29.7) / 2200	47.6 (35.0) / 2200	47.6 (35.0) / 2200
Number of cylinder		3	4	4
Bore × Stroke	mm	87 × 102	87 × 110	87 × 110
Displacement	cc	1826	2615	2615
Fuel <sup>3</sup>		Diesel fuel conforming to EN 590 / HVO conforming to EN 15940		
<b>Overall length</b>	mm	5355	5490	5520
<b>Overall height</b>	mm	2550	2550	2550
<b>Swivelling speed</b>	rpm	9.2	9.2	9.2
<b>Rubber shoe width</b>	mm	400	400	400
<b>Tumbler distance</b>	mm	1990	1990	1990
<b>Dozer size (width × height)</b>	mm	1960 × 410	1960 × 410	1960 × 410
<b>Hydraulic pumps</b>				
P1, P2		Variable displacement pump	Variable displacement pump	Variable displacement pump
Flow rate	ℓ/min	118.8	56.1 + 56.1	56.1 + 56.1
Hydraulic pressure	MPa	24.5	27.4	27.4
P3		–	Gear type	Gear type
Flow rate	ℓ/min	–	37	37
Hydraulic pressure	MPa	–	19.1	19.1
<b>Max. digging force (arm / bucket)</b>	kN	22.6 / 32.8	26.4 / 42.3	24.5 / 42.3
<b>Boom swing angle</b>	deg	70 / 55	70 / 53	70 / 53
<b>Auxiliary circuit (SP1)</b>				
Flow rate	ℓ/min	65	75	75
Hydraulic pressure	MPa	20.6	20.6	20.6
<b>Auxiliary circuit (SP2)</b>				
Flow rate	ℓ/min	37	37	37
Hydraulic pressure	MPa	20.6	19.1	19.1
<b>Hydraulic reservoir (tank / full)</b>	ℓ	40 / 67	41.9 / 77	41.9 / 77
<b>Fuel tank capacity</b>	ℓ	66	66	73
<b>Max. travelling speed (low / high)</b>	km/h	2.8 / 4.8	2.8 / 4.8	2.8 / 4.8
<b>Ground contact pressure</b>	kPa (kgf/cm <sup>2</sup> )	28.0 (0.286)	31.6 (0.322)	31.8 (0.324)
<b>Ground clearance</b>	mm	310	310	310
<b>Noise level</b>				
LpA / LwA (2000/14/EC)	dB (A)	71 / 96	74 / 96	74 / 96
<b>Vibration**4</b>				
<b>Hand arm system (ISO 5349-2:2001)</b>				
Digging / Levelling	m/s <sup>2</sup> RMS	<2.5 / <2.5	<2.5 / <2.5	<2.5 / <2.5
Driving / Idling	m/s <sup>2</sup> RMS	<2.5 / <2.5	<2.5 / <2.5	<2.5 / <2.5
<b>Whole body (ISO 2631-1:1997)</b>				
Digging / Levelling	m/s <sup>2</sup> RMS	<0.5 / <0.5	<0.5 / <0.5	<0.5 / <0.5
Driving / Idling	m/s <sup>2</sup> RMS	<0.5 / <0.5	<0.5 / <0.5	<0.5 / <0.5

\*1 Cabin with standard bucket (U50-5: 115 kg / U56-5, KX060-5: 119 kg) ready for operation. Machine weight includes 75 kg operator.

\*2 With diesel fuel conforming to EN590.

\*3 Note that HVO has lower density than diesel fuels.

\*4 These values are measured under specific conditions at maximum engine speed and can deviate, depending on the operating status.

## Fluorinated greenhouse gases

Air conditioner gas contains fluorinated greenhouse gases.

CAB model	Industrial designation	Quantity (kg)	CO <sub>2</sub> equivalent (ton)	GWP
U50-5/U56-5/KX060-5	HFC-134a	0.7	1.01	1430

(Global Warming Potential: GWP)

# Lifting capacity


kN (t)

Model		U50-5																
Lift Point Height	Lift point radius (2.5m)				Lift point radius (3m)				Lift point radius (4m)				Lift point radius (4.5m)				Lift point radius (max)	
	Over-front		Over-side		Over-front		Over-side		Over-front		Over-side		Over-front		Over-side		Over-front	Over-side
	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up
3m	-	-	13.3 (1.36)	-	-	9.5 (0.97)	7.7 (0.78)	7.7 (0.78)	6.3 (0.64)	7.7 (0.78)	6.4 (0.65)	5.3 (0.54)	-	-	-	-	-	-
2m	14.6 (1.49)	14.6 (1.49)	13.3 (1.36)	11.4 (1.16)	11.4 (1.16)	9.5 (0.97)	8.7 (0.89)	7.6 (0.77)	6.3 (0.64)	8.0 (0.82)	6.3 (0.64)	5.3 (0.54)	-	-	-	-	-	-
1m	-	-	-	-	-	-	10.0 (1.02)	7.2 (0.74)	6.0 (0.61)	8.8 (0.90)	6.1 (0.62)	5.2 (0.53)	7.9 (0.81)	5.2 (0.53)	4.6 (0.47)	-	-	-
0m	-	-	-	-	-	-	10.6 (1.08)	7.0 (0.72)	6.0 (0.61)	9.1 (0.92)	6.0 (0.61)	5.2 (0.53)	-	-	4.6 (0.47)	-	-	-
-1m	-	-	6.8 (0.69)	-	-	9.2 (0.94)	9.8 (1.00)	7.0 (0.71)	6.0 (0.61)	-	-	-	-	-	-	-	-	-
-2m	-	-	6.8 (0.69)	10.2 (1.04)	10.2 (1.04)	9.2 (0.94)	-	-	6.0 (0.61)	-	-	-	-	-	-	-	-	-
-3m	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Model		U56-5																
Lift Point Height	Lift point radius (2.5m)				Lift point radius (3m)				Lift point radius (4m)				Lift point radius (5m)				Lift point radius (max)	
	Over-front		Over-side		Over-front		Over-side		Over-front		Over-side		Over-front		Over-side		Over-front	Over-side
	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up
3m	-	-	15.7 (1.60)	-	-	11.3 (1.15)	10.2 (1.04)	9.4 (0.96)	7.3 (0.74)	-	-	5.3 (0.54)	-	-	-	-	-	-
2m	19.6 (1.99)	19.3 (1.97)	15.7 (1.60)	15.4 (1.57)	14.2 (1.45)	11.3 (1.15)	11.7 (1.19)	9.0 (0.92)	7.3 (0.74)	10.1 (1.03)	6.4 (0.65)	5.3 (0.54)	-	-	-	-	-	-
1m	-	-	-	-	-	-	13.5 (1.38)	8.6 (0.88)	6.9 (0.70)	10.6 (1.08)	6.2 (0.63)	5.2 (0.53)	9.7 (0.99)	5.8 (0.59)	4.9 (0.50)	-	-	-
0m	-	-	-	-	-	-	14.4 (1.47)	8.3 (0.85)	6.9 (0.70)	10.5 (1.07)	6.1 (0.62)	5.2 (0.53)	-	-	4.9 (0.50)	-	-	-
-1m	-	-	-	-	-	9.0 (0.92)	13.4 (1.37)	8.2 (0.84)	7.0 (0.71)	-	-	-	-	-	-	-	-	-
-2m	-	-	-	-	-	9.0 (0.92)	-	-	7.0 (0.71)	-	-	-	-	-	-	-	-	-
-3m	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Model		KX060-5 (1820 mm arm)																
Lift Point Height	Lift point radius (2.5m)				Lift point radius (3m)				Lift point radius (4m)				Lift point radius (5m)				Lift point radius (max)	
	Over-front		Over-side		Over-front		Over-side		Over-front		Over-side		Over-front		Over-side		Over-front	Over-side
	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up
3m	-	-	17.7 (1.80)	-	-	13.0 (1.33)	9.6 (0.98)	9.6 (0.98)	8.4 (0.86)	9.1 (0.92)	7.4 (0.75)	6.1 (0.62)	-	-	-	-	-	-
2m	17.6 (1.80)	17.6 (1.80)	17.7 (1.80)	14.3 (1.46)	14.3 (1.46)	13.0 (1.33)	11.2 (1.14)	10.3 (1.05)	8.4 (0.86)	9.8 (1.00)	7.3 (0.74)	6.1 (0.62)	-	-	-	-	-	-
1m	-	-	-	-	-	-	13.0 (1.33)	9.8 (1.00)	7.9 (0.81)	10.4 (1.06)	7.1 (0.72)	6.0 (0.61)	9.0 (0.92)	6.3 (0.64)	5.5 (0.56)	-	-	-
0m	-	-	-	-	-	-	14.1 (1.44)	9.5 (0.97)	7.9 (0.81)	10.5 (1.08)	6.9 (0.71)	6.0 (0.61)	-	-	5.5 (0.56)	-	-	-
-1m	-	-	6.3 (0.64)	-	-	11.7 (1.19)	13.6 (1.38)	9.3 (0.95)	7.9 (0.81)	-	-	-	-	-	-	-	-	-
-2m	-	-	6.3 (0.64)	-	-	11.7 (1.19)	10.1 (1.03)	9.5 (0.97)	7.9 (0.81)	-	-	-	-	-	-	-	-	-
-3m	-	-	6.3 (0.64)	-	-	11.7 (1.19)	-	-	7.9 (0.81)	-	-	-	-	-	-	-	-	-

Model		KX060-5 (1570 mm arm)																
Lift Point Height	Lift point radius (2.5m)				Lift point radius (3m)				Lift point radius (4m)				Lift point radius (5m)				Lift point radius (max)	
	Over-front		Over-side		Over-front		Over-side		Over-front		Over-side		Over-front		Over-side		Over-front	Over-side
	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up	Blade Down	Blade Up
3m	-	-	18.0 (1.83)	-	-	13.0 (1.33)	10.6 (1.08)	10.6 (1.08)	8.5 (0.87)	-	-	6.2 (0.63)	-	-	-	-	-	-
2m	20.5 (2.09)	20.5 (2.09)	18.0 (1.83)	16.0 (1.63)	16.0 (1.63)	13.0 (1.33)	12.1 (1.23)	10.4 (1.06)	8.5 (0.87)	10.4 (1.06)	7.4 (0.75)	6.2 (0.63)	-	-	-	-	-	-
1m	-	-	-	-	-	-	13.7 (1.40)	9.9 (1.01)	8.1 (0.83)	10.8 (1.10)	7.2 (0.74)	6.1 (0.62)	10.4 (1.06)	6.9 (0.70)	5.9 (0.60)	-	-	-
0m	-	-	-	-	-	-	14.4 (1.47)	9.6 (0.98)	8.1 (0.83)	10.5 (1.08)	7.1 (0.72)	6.1 (0.62)	-	-	5.9 (0.60)	-	-	-
-1m	-	-	-	-	-	8.7 (0.89)	13.4 (1.36)	9.6 (0.98)	8.1 (0.83)	-	-	-	-	-	-	-	-	-
-2m	-	-	-	-	-	8.7 (0.89)	-	-	8.1 (0.83)	-	-	-	-	-	-	-	-	-
-3m	-	-	-	-	-	8.7 (0.89)	-	-	8.1 (0.83)	-	-	-	-	-	-	-	-	-

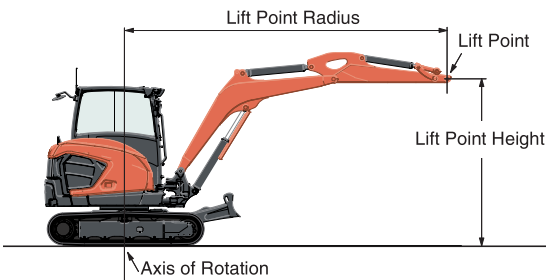

Please note:

- \* The lifting capacities are based on ISO10567 and do not exceed 75% of the static tilt load of the machine or 87% of the hydraulic lifting capacity of the machine.
- \* The excavator bucket, hook, sling and other lifting accessories are not included on this table.
- \* Standards EN474-1 and EN474-5 require the machine to be fitted with a safety valve on the boom cylinder and an overload warning buzzer for object handling operations.

★ All images shown are for brochure purposes only.  
When operating the excavator, wear clothing and equipment in accordance to local legal and safety regulations.

**Kubota Genuine and Approved Parts**  
for maximum performance, durability and safety